

EPFAC-75-A

Datasheet




Technical data:

Supply voltage	90..305 V-AC, 47-63 Hz, 127-431 V-DC
Rated input	131 W
Weight	15 kg
Cooling power (L35/L35)	85 W
Degree of protection (outside part)	IP67
Degree of protection (inside part)	IP20
Operating temperature range	-20 .. +70 °C
MTBF	137500 h min.
Alarm-contact	max. 250 V-AC / 30 V-DC max. 5 A
Alarm-temperature	80°C +/- 5°C heatsink-temperature
Emergency-shutdown-temperature	90°C +/- 5°C heatsink-temperature
Certificates	CE



Performance:

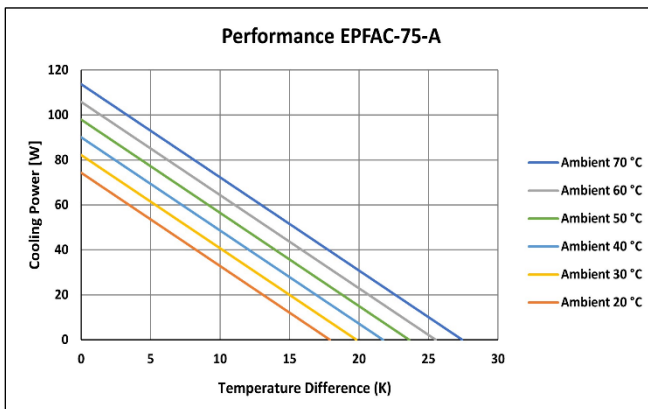

Terminals:

Terminal	Connection
1	Voltage output (+ 24 V-DC)
2	Voltage output (0 V)
3	Peltier-Modules (+ 24 V-DC)
4	Peltier-Modules (0 V)
5	Internal Fan (+ 24 V-DC)
6	NC-Alarm-Contact (potential free)
7	NC-Alarm-Contact (potential free)
8	L - Supply voltage (90..305 V-AC)
9	N - Supply voltage (90..305 V-AC)
10	Ground

Terminals WAGO 260 series

spring-type terminal 0,5 ..1,5 mm²

Dimensions:

